
Refletor LED

Please take time to read this leaflet carefully and retain it for future reference.

Diagram:

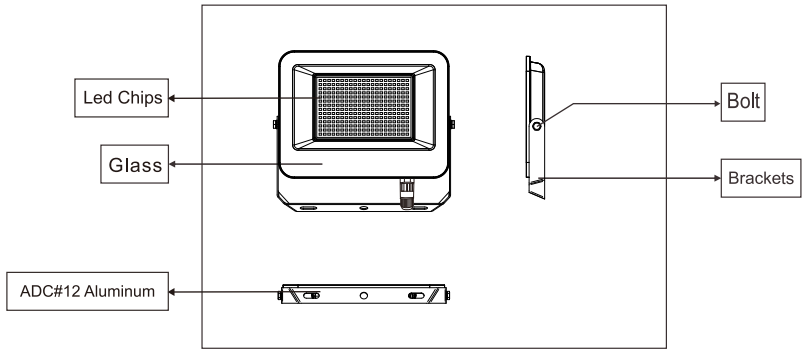

Specification:

Voltage	AC220-240V				
Power factor	>0.9				
Wattage	30W	50W	100W	150W	200W
Lumen	2700lm	4500lm	9000lm	13500lm	18000lm
Lamp type	SMD2835 chip				
CRI	>80				
Material	ADC#12 Aluminum				
Beam angle	120°				
Products size(mm)	181x141x27	201x162x27	254x211x27	304x231x30	407x306x30
Color Temp	3CCT(3000K/4000K/6500K)				
Work Temp	-10°C~+50°C				
Protection	IP65				
Housing color	Black				

Important Safety Information

- Do not wire this floodlight into the lighting circuit - use a switched fused spur
- Before installation and servicing, disconnect the electrical supply at the mains.
- Carefully observe all instructions or warnings that are labelled on, or supplied with, your product.
- This product is suitable for outdoor use. If in any doubt, consult a qualified electrician.


Fixing instructions

Do not wire this floodlight into the lighting circuit - use a switched fused spur.
This fitting must be earthed. contact a qualified electrician to install a suitable earth facility.
Ensure the electricity is turned off at the mains before installing or maintaining any electrical fitting.
Please note: For new installations, check for any electrical cables or pipe work (gas/water) in the vicinity of the intended mounting point for this product, before proceeding with the installation.


General Information

Do not mount ceiling/wall fittings onto damp surfaces such as newly painted or plastered areas as this may cause discolouration of the finish.


Tools which may be required:
- Drill
- Cross Head Screwdriver
- Small Electrical Slotted Screwdriver
- Insulation Tape

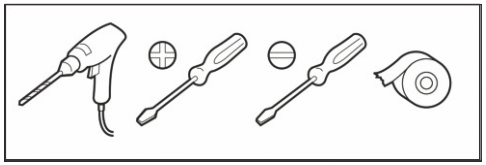


Installation:

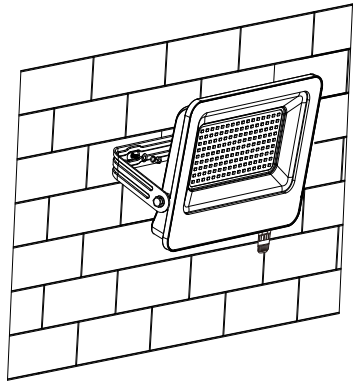

1-Fasten the adjustable bracket with stainless steel screws

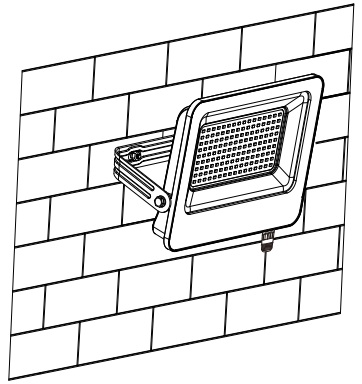

2-Connect the Main Line to the power wire of the lamp.

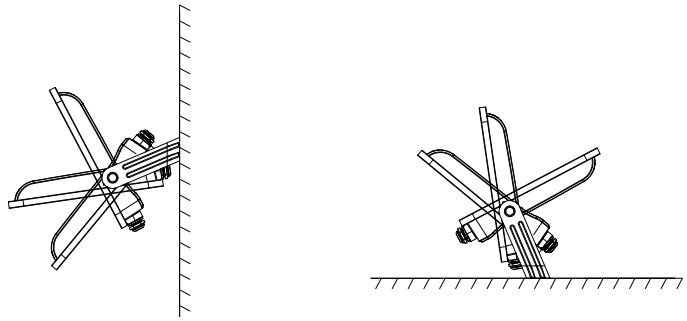

3-Install the LED flood lights in the ground, wall, and ceiling.

This product should be disposed of responsibly at the end of its life. Please recycle where facilities exist. Check with your Local Authority or retailer for recycling advice (Waste Electrical and Electronic Equipment Directive)